

# OPTIMUM CONNECTING ROD DESIGN FOR DIESEL ENGINES

M.Sc. Kaya T. <sup>1</sup>, Asist. Prof. Temiz V. PhD.<sup>2</sup>, Asist. Prof. Parlar Z. PhD.<sup>2</sup>  
 Siemens Turkey<sup>1</sup>  
 Faculty of Mechanical Engineering – Istanbul Technical University, Turkey <sup>2</sup>  
 temizv@itu.edu.tr

**Abstract:** One of the most critical components of an engine in particular, the connecting rod, has been analyzed. Being one of the most integral parts in an engine's design, the connecting rod must be able to withstand tremendous loads and transmit a great deal of power. This study includes general properties about the connecting rod, research about forces upon crank angle with corresponding to its working dependencies in a structural mentality, study on the stress analysis upon to this forces gained from calculations and optimization with the data that gained from the analysis. In conclusion, the connecting rod can be designed and optimized under a given load range comprising tensile load corresponding to 360° crank angle at the maximum engine speed as one extreme load, and compressive load corresponding to the peak gas pressure as the other extreme load.

**Keywords:** CONNECTING ROD, OPTIMIZATION, DIESEL ENGINE

## 1. Introduction

During the design of a connecting rod, optimized dimensions allowing the motion of rod during operation should be taken into account in the calculation of variable loads induced in the system and the resulting data should be tested experimentally. Therefore, a connecting rod design and manufacturing, production technologies, materials performance analysis is laborious and long lasting process involving many steps. Computer-aided design and analysis programs which are being used widely currently, are part of the design of a more flexible manner and to ensure a shorter time changes in design. By applying the finite element method, more reliable and more realistic results are obtained in practice. Thus, instead of using all designed models, only the most appropriate model optimized numerically can be used for performance testing, providing significant time and cost saving.

Connecting rod's loading state is quite complicated. It is exposed to high pressure loads due to the combustion in the chamber, is also repeatedly subjected to high tensile forces due to the inertia. Therefore, the reliability of this engine component is of critical importance. Due to the reasons mentioned above research topics such as connecting rod manufacturing technology, materials, performance simulation, fatigue are the subjects for both academic and industrial research. The connecting rod material and manufacturing technique have been demonstrated as the most important parameters for optimal design [1, 2]. Also, the stress distribution induced in the connecting rod depending on operating conditions, is examined in detail in related literature [3-5]. There are also remarkable researches involving the optimum design of the connecting rod which exposed to variable stress from the viewpoint of fatigue [6-9].

In the work presented here, a connecting rod is modeled numerically for a 4-cylinder, 4-stroke diesel engine. The most critical sections of connecting rod are determined based on mechanical strength. According to this, the optimum geometric parameters effecting connecting rod's mechanical parameters have been optimized.

## 2. Detailed information for available connecting rod

The modeled connecting rod is used for a commercial 4-cylinder, 4-stroke diesel engine. Operating parameters of engine is as follows: Maximum cylinder pressure is 190 bar and compressive load at 2000 rpm will be 100 kN when engine reaches its maximum speed of rotation (5100 rpm) tensile load will be 15 kN. Nominal power of engine is 150 kW, connecting rod length is 145 mm, diameter of crankshaft is 43,2 mm, stroke of cylinder is 88 mm, and diameter of cylinder is 85 mm.

A set of forces resulting from various effects such as pressure inside the cylinder, inertia and friction induce stresses on connecting

rod. Force caused by pressure inside the cylinder reaches its maximum value around the top dead center. Inertia forces results from the acceleration of moving elements. Numerical values of these forces are dependent on the type, rated power and rotational speed of engine. Forces resulting from the pressure especially gain importance on diesel engines due to high combustion chamber pressures. Inertia force reaches remarkable values at high speeds. Inertia forces with respect to crank angle is given in Table 1.

**Table 1:** Inertia forces for various crank angles.

Crank angle (°)	Inertia Forces (kN)		Crank angle (°)	Inertia Forces (kN)		Crank angle (°)	Inertia Forces (kN)	
	Fpx	Fpy		Fpx	Fpy		Fpx	Fpy
0	-4.5	-2197.4	270	-	492.7	450	153.6	499.8
30	-	-1711.7	300	151.8	-586.7	480	280.5	1065.1
60	-	-579.9	330	249.3	-1715.6	510	179.8	1202.3
90	153.6	499.8	360	-4.5	-2197.4	540	2.5	1204.8
120	280.5	1065.1	300	151.8	-586.7	570	-	1200.1
150	179.8	1202.3	330	249.3	-1715.6	600	-	1060.2
180	2.5	1204.8	360	-4.5	-2197.4	630	-	492.7
210	-	1200.1	390	-	-1711.7	660	151.8	-586.7
240	-	1060.2	420	-	-579.9	690	249.3	-1715.6

Fpx: Inertia force at x-direction; Fpy: Inertia force at y-direction

In industrial applications, I and H formed cross-section for connecting rod design are used extensively regarding lightness and manufacturing advantages. In this study, H- type section is selected in order to achieve easy manufacturing from the viewpoint of lightweight design and to form more suitable transient region between the rod and big-end.

Connecting rods are generally manufactured by forging. Therefore, high strength malleable steels should be used as connecting rod material. Depending on the application, connecting rods are made of carbon steels or steel alloys. The research carried out on the powder forged in the 1970s and 1980s has led to the making of this method industrially applicable. In Table 2, the modeled connecting rod's mechanical properties are presented [10].



As a solution, it is assumed that an increase in the  $l_c$  and  $b_{sh}$  dimensions would be satisfactory. Since, the available connecting rod design gave good results in tension analysis, an increase in the  $l_c$  and  $h_{sh}$  dimensions make the situation better.

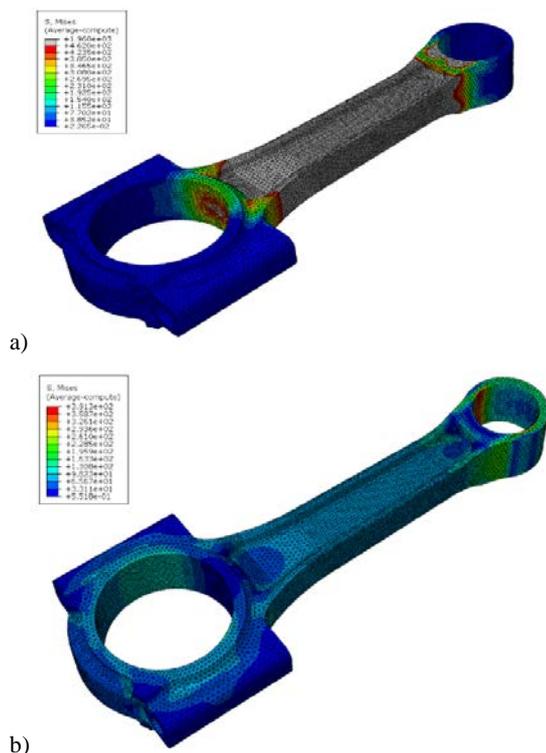


Fig.4: a) Compression analysis. b) Tension analysis

#### 4. Optimization of connecting rod

At this stage, a practical method is used to reach an optimal geometry by constituting a drawing model with an ability of varying parametric dimensions utilizing an analysis tool embedded in the software. Basic static models give satisfactory results for obtaining idealistic geometry at the optimization stage. Different models derived from parametric model by changing critical dimensions have been analyzed by using finite element software to reach an ideal form. By using optimal dimensions obtained from optimization process and by taking into consideration the appropriate manufacturing methods, a connecting rod is designed as shown in the Fig. 5 (named Model-4). The wall thickness was increased in this design in order to make improvement against compressive stresses.

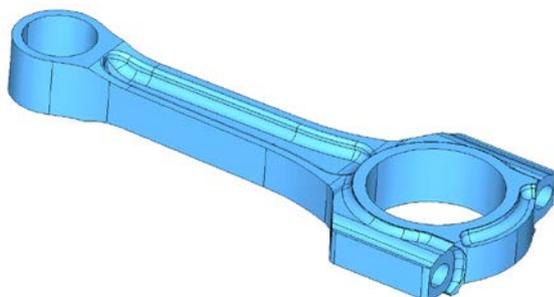


Fig.5 : Model – 4

The new geometry has been analyzed on the basis of both compression and tension. The results of analysis are shown in Fig. 6. Some improvements are observed with respect to other models.

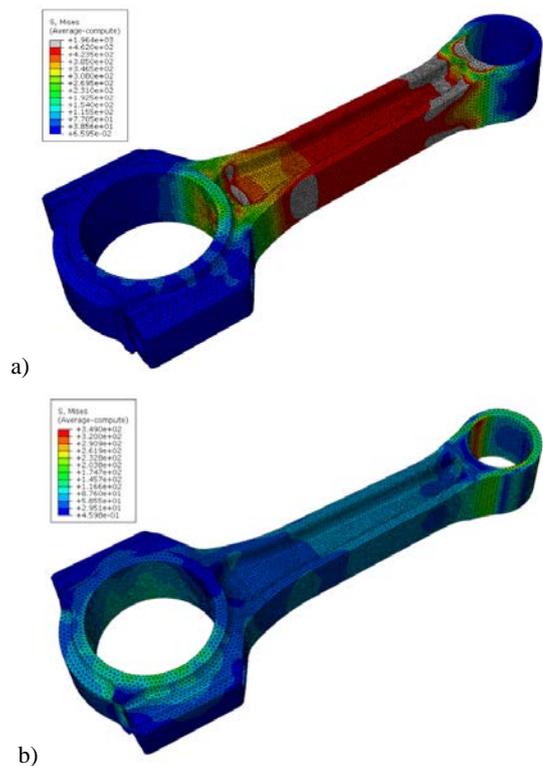


Fig.6: Model-4 a) Compression analysis. b) Tension analysis

Although new design modifications on connecting rod gave promising results, but the desired improvements have not been reached. It has been found that, increasing wall thickness is not sufficient enough to get better analysis results. Since further increase on wall thickness would be unfavorable, it has been considered that some fundamental variations on connecting rod form would be more realistic.

As seen from Fig. 7 that in the modified model named as Model-5, the material is gathered on the transition zones from rod to big and small heads. Some remarkable changes have been carried out especially on the transition zone between rod and big head. Unnecessary parts have been removed from the shoulder region. Force lines on the transition zone between rod and small head have been improved. Furthermore,  $h_{sh}$  dimension in Fig. 1 has been increased.



Fig.7: Model – 5

The analysis results for Model – 5 is shown in Fig.8. A satisfactory amount of improvement is observed for this model. Although there are some local points around the transition zone in which the yield strength of material is exceeded, this is mainly due to the neglecting damping effect and absence of bush on the connecting rod. Analysis of connecting rod under tensile stress gives satisfactory results as expected. The overstressed point on the analysis results table take place as a result of a discontinuity on

meshing process. This discontinuity has no effect on analysis process.

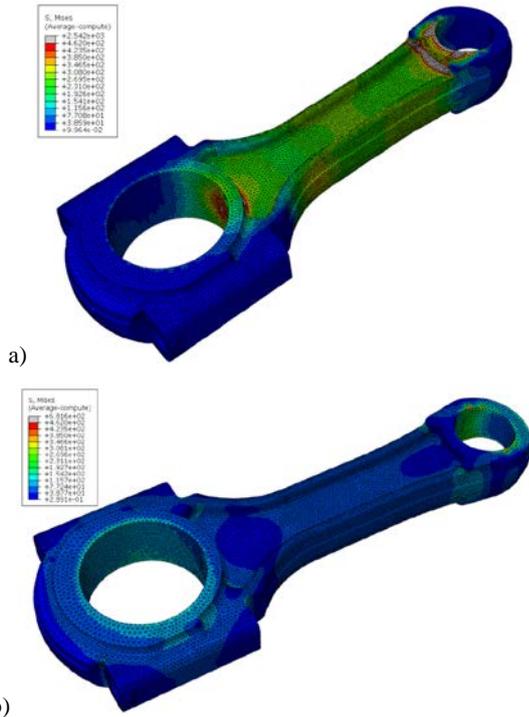


Fig.8: Model -5 a) Compression analysis. b) Tension analysis

4.1. Weight Reduction Studies

As a results of analysis conducted, satisfactory improvements are carried out for connecting rod. After this stage, some sections of connecting rod where the stress values are low can be redesigned from the viewpoint of weight reduction. Some remarkable amount of material was removed from cap section. Furthermore, material reduction was applied to the transition regions from the rod to big and small heads. Optimized connecting rod after weight reduction process is shown in Fig.9. Weight of connecting rod was reduced from 687.4 g to 663.7 g with this process.



Fig.9 : Optimized connecting rod

Analysis result of connecting rod under compression for the final optimized design is shown in Fig. 10.

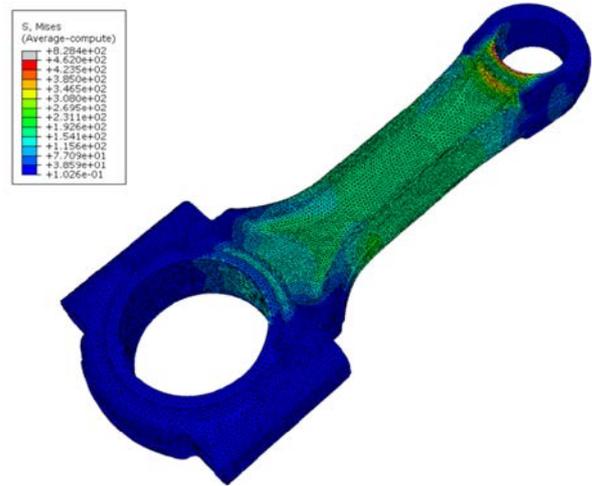


Fig.10 : Analysis of final design connecting rod under compression.

Transition from rod to big head is transferred to totally safe region according to the analysis for compressive stress. Even though the stresses on the transition section from rod to small head seems very close to yield strength, this is caused by not using a bush for modelling the system.

5. Conclusion

At end of this study, a new connecting rod design having optimized dimensions and sufficient strength has been suggested for given basic dimensions and operating conditions. At the first stage, the connecting rod formed from preliminary work was analyzed numerically and weak points of this design was determined. The optimum connecting rod geometry was reached by applying some design modifications to these points.

In this study, elastic properties for connecting rod material was used. Using plastic material data will be more satisfactory for analysis. Induced stresses can be more calculated more precisely by meshing the connecting rod finer and more detailed.

For preliminary work, linear static analysis will be sufficient in order to determine the basic geometry. But, for future work, bushing, crank bearings and damping effect can be taken into account. By introducing the bolts tightened with rated torque in order to obtain correct preload to analysis, it is possible to get results which have relatively good conformity with actual part.

Furthermore, these analyses can be compared to test data in order to increase reliability of design.

6. References

1. **Shenoy, P. S.,** Dynamic Load Analysis and Optimization of Connecting Rod, MSc Thesis, The University of Toledo, ABD. May 2004

2. **Dale, J.R.**, Connecting Rod Evaluation.Metal Powder Industries Federation. Ocak 2005
3. **Prata, A., Fernandes, J. ve Fagotti, F.**, Dynamic Analysis of Piston Secondary Motion for Small Reciprocating Compressors, Transactions of ASME,760/Vol. 122, 2000, 75
4. **Kayan, I.**, Cisimlerin Mukavemeti (In Turkish). Istanbul Tech. Univ. Publications. Sayı:1334, 1984.
5. **Webster, W. D., Coffel, R. ve Alfaro, D.**,A Three Dimensional Finite Element Analysis of a High Speed Diesel Engine Connecting Rod, SAE Technical Paper 831322,1983
6. **Sarihan, V. ve Song, J.**, Optimization of the Wrist Pin End of an Automobile Engine Connecting Rod With an Interference Fit, Journal of Mechanical Design, Transactions of the ASME, 112(3), 1990, 406-412.
7. **El-Sayed, M. E. M. ve Lund, E. H.**, Structural Optimization With Fatigue Life Constraints, Engineering Fracture Mechanics, 37(6), 1990, 1149-1156.
8. **Pai, C. L.**,The Shape Optimization of a Connecting Rod With Fatigue Life Constraint, International Journal of Materials and Product Technology, 11(5-6),1996, 357-370.
9. **Augugliaro, G. ve Biancolini, M. E.**, Optimisation of Fatigue Performance of a Titanium Connecting Rod, SAE technical paper 980800,2003,1-3.
10. **Visser, D.**, A Comparison of Manufacturing Technologies in the Connectiong Rod Industry, Submission toFIERF 06-06-08.
11. **Kolchin, A., Demidov, V.**, Design of Automotive Engines, MIR Publishers, Moskova, 1984, 244-266.